

# JESTAC

**3M** DI-NOC<sup>TM</sup> Architectural  
Finishes

Special Promotion - Limited Availability

ENHANCE, REFRESH, SUSTAIN







# Exclusive Offer: Limited DI-NOC Finishes for a Stunning Home Upgrade!

Available for a limited time, enjoy top-tier upgrades at an unbeatable price!

3M™ DI-NOC™ Architectural Finishes offer a cost-effective and eco-friendly solution for updating your home's interiors. With minimal disruption, you can transform doors, furniture, and walls without the hassle of replacements.

## Key Benefits:

- Cost-effective vs. Replacing the whole door
- Fast, easy installation in a single day.
- Sustainable, eco-friendly with minimal waste
- Scratch and water-resistant, durable for long-term use.

Starting from **\$688 nett** for 1 HDB Main Door! Enjoy a stylish and affordable transformation with our premium 3M™ DI-NOC™ series.

Call us at **6288 8290** or email us at **[sales@jestac.com.sg](mailto:sales@jestac.com.sg)** to learn more!





# Discover premium finishes at unbeatable prices – available for a limited time only.

## **Fine Wood Series:**

Subtle, textured wood finishes that add elegance to modern interiors.

## **Solid Series:**

Smooth and seamless, perfect for minimalist designs and bold statements.

## **Stone Series:**

Natural beauty of stone textures without the weight or cost.

## **Wood Grain Series:**

Warm, realistic wood textures for a timeless look.

## **Metallic Series:**

Sleek, industrial textures that add shine and sophistication.


## **Metallic Wood Series:**

Unique blend of wood's natural charm with metallic's modern edge.




# FINE WOOD


LIMITED STOCK




FW-1021




FW-1135

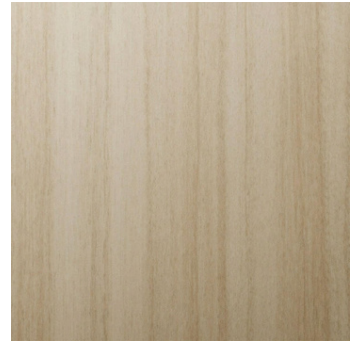


FW-1207



FW-1331




FW-1751

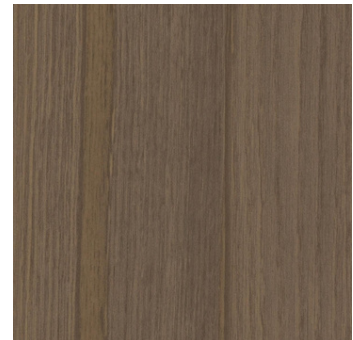


FW-1770



FW-1804



FW-1805

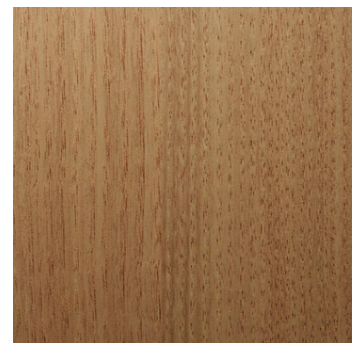


FW-1810









FW-231




FW-337




FW-608H




FW-7008




FW-7009




FW-7011




FW-7016



FW-795



FW-1281



FW-502



FW-1273



# SOLID




PS-1008




PS-116




PS-1188




PS-140



PS-503

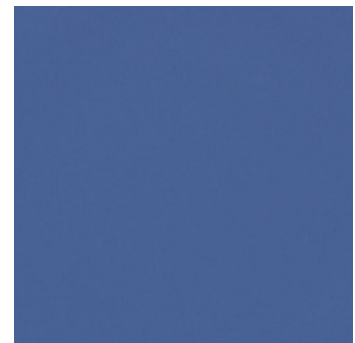

PS-920



PS-971




# STONE


LIMITED STOCK



ST-1195



ST-1586



ST-1587



ST-1829




Before




After

# METALLIC




PA-039



PA-187



# METALLIC WOOD




ME-5888






# WOOD GRAIN




WG-1058 




WG-1368

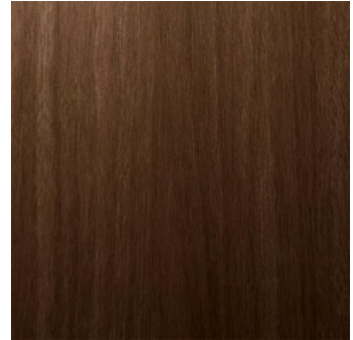


WG-1369




WG-1370





WG-156

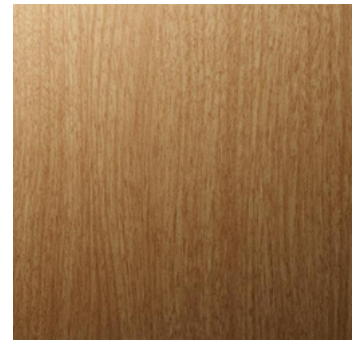


WG-1815



WG-2115 




WG-364

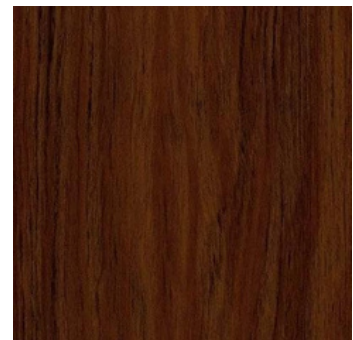


WG-430







WG-664




WG-836




WG-947



WG-1063



WG-2073



WG-1835





# Technical Information

## Product Description

3M™ DI-NOC™ Architectural Finishes are decorative surface finishes for interior and exterior applications, available in 1000+ designs. These decorative films are easy to install and conform to a variety of flat or curved surfaces including walls, panels and ceilings. From industrial concretes to elegantly aged woods; vibrant pops of colour to rich marbles, 3M DI-NOC Finishes marry innovative aesthetics and intelligent design.

## Featured Benefits of DI-NOC Architectural Finishes

- Interior Applications - Ideal for casework, doors, columns, walls and more.
- Exterior Applications - Ideal for façades, window frames, doors, columns, walls and more.
- Application Surfaces - Use on metal, wood, glass and more.
- Aesthetics - Resemble natural materials and other types of surfaces to deliver the look you want.
- Remodel and Reuse - Goes up fast, with less likelihood of error and waste, and brings life to existing assets. The architectural finishes convert wood or metallic spaces to reflect an entirely new design with abstract or colored finishes.
- Easy Application - 3M™ Comply™ Adhesive technology virtually eliminates bubbles, simplifying and speeding application. It also bonds powerfully to many substrates.

## DI-NOC Series Selection

It is important to consider the intended use when selecting DI-NOC patterns. Please refer to the most up-to-date 3M™ DI-NOC™ Architectural Finishes Technical Data Sheet and Installation Guide, which can be found by visiting 3MArchitecturalMarkets.com. You may also contact JESTAC, 3M Authorized Distributor for additional information.

## Product Characteristics

The values in these tables are typical, and are based on test data deemed reliable but are not warranted.

Characteristic		Value
Material	Film	Vinyl for most patterns; Polyolefin for E-series; Polyester for select patterns such as WH-111
	Adhesive	Pressure-sensitive acrylic, permanent
	Release Liner	Silicone-coated poly paper
Thickness	Film + Adhesive	8 mils (200 microns) nominal, not including release liner; Some designs vary slightly in thickness due to embossing
	Release Liner	6.2 mils (157 microns)
Roll Size	Standard & E Series	48 in. x 164 ft. (1220mm x 50m)
	AR, WG,-GN, VM, ET	48 in. x 82 ft. (1220mm x 25m)
Weight		55 lbs. (25kg) (approx.) for a 164 ft. (50m) roll

## Product Performance

The values in these tables are typical, and are based on test data deemed reliable but are not warranted.


Characteristic	Evaluation	Results
Heat Resistance*	Aged at 150°F (65°C) for 28 days.	No delamination or visible change
Moisture Resistance*	Aged at 104°F (40°C), 95% humidity for 30 days	No delamination or visible change
Ultraviolet Light Exposure	Exposed to carbon arc accelerated UV light for 250 hours	No visible change
Abrasion Resistance	Taber® CS-17 Abrasion wheel: 1 Kg loading weight, 7,000 cycles	No wear-through of surface finish
Fire Resistance	When used in Interior Applications as defined by NFPA 101 “Life Safety Code”, Test Method ASTM E84	Most Products have Class A
Industry-Specific Testing	IMO Certification/USCG Type Approval, Intertek Firedoor, and CAN/ULC-S102.2	Contact 3M for certification details

\* Product applied to an aluminium plate



Comply™ Adhesive Technology

Comply Adhesive has air-release channels that allow trapped air bubbles to escape during application. Dry application only.

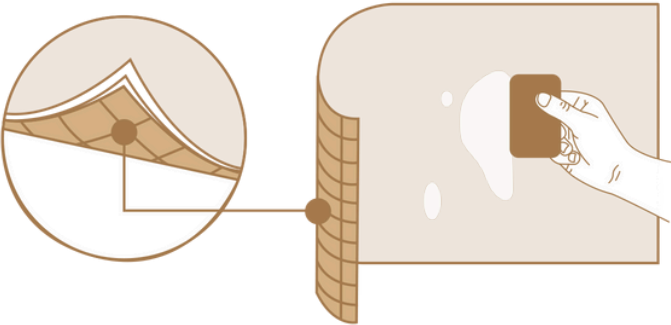

Stain Resistance

Contaminant was in contact with the film surface for 24 hours and then removed using water or mild detergent. Results may vary.

Contaminant	Results
Coffee	●
Tea	○
Cola	●
Vinegar	●
Red Wine	●
Soap Solution (1%)	●
Ethyl Alcohol (50%)	●

● Removed with water  
○ Removed with mild detergent

Cleaning and Maintenance

Regular cleaning will help maintain the appearance of the finish. Use mild detergent and water, and a soft cloth or sponge without abrasives. For difficult stains, spot clean with a diluted Isopropyl Alcohol solution and a soft cloth. Avoid using strong solvents or detergents that are either highly alkaline (pH>11) or acidic (pH<3). Do not use ammonia, chlorine, or strong organicbased cleaning products, polishing or cleaning compound, hard-bristle brushes or electric polishing equipment. Use only clean, nickfree tools and wipe gently.

Problem	Solution
Dust and grit	Wipe with a soft, damp cloth.
Soiled (but not gritty)	Use water and a soft cloth
Heavily Soiled	Clean first using a solution of mild liquid detergent and water, then use clear water. Wipe gently with a soft cloth.
Difficult Stains	Spot clean with 70/30 IPA (70% Isopropyl Alcohol/30% Water) cleaning solution.

Resistance to Solvents, Cleaners and other Chemicals

Film was applied to an aluminium plate, left for 72 hours, then immersed in the following chemicals:

Contaminant	Results	Immersion Time	Result
Water	Water	24 hours	No visible change
Acid	Chloride (10%)	24 hours	No visible change
	Hydrogen Peroxide	72 hours	No visible change
Base (Alkali)	Sodium Hydroxide 10%	24 hours	No visible change
Alcohol	Ethanol	24 hours	No visible change
	Isopropyl Alcohol	72 hours	No visible change

Application and Removal Guidelines

The values in this table are typical, and are based on test data deemed reliable but are not warranted. Refer to the 3M™ DI-NOC™ Architectural Finishes Installation Guide for additional information.

Characteristic	Value
Application Surface Type	Smooth, hard, non-porous (sealed) material
Application Location	Interior & Exterior (EX Series)
Application Temperature	54-100°F (12-38°C) air and application surface
Application Method	Dry Application
High Humidity Environments	Products are not recommended for Interior Applications where condensation consistently occurs.



## Ready to Transform Your Space?

2 Kim Chuan Dr, #02-06 CSI Distribution  
Centre, Singapore 537080

☎ Phone: 6288 8290

✉ Email: [sales@jestac.com.sg](mailto:sales@jestac.com.sg)

🌐 Website: [www.jestac.com.sg](http://www.jestac.com.sg)

