

# ALTAC Aluminium Matting System

The ideal matting system for your specific needs.

## DESCRIPTION


ALTAC Aluminium Mat is a rigid frame matting incorporated with 1" (width) INNER T Series carpet mat inserts which scrap, trap and hold dirt and soil for high traffic application. It is designed with flexible joints for easy roll-up and protected with sound dampening base.

## FEATURES

- ◆ 100% polypropylene fibre with superior wear resistance and good absorption capacity.
- ◆ Able to scrap, trap and hold soil and dirt.
- ◆ Applicable to high traffic public areas.
- ◆ Can be customized to various sizes and shapes to fit building entrances.
- ◆ Easy to clean and maintain with Flexible Joint System.

## APPLICATIONS

- ◆ Entrances at commercial buildings, shopping malls, factories, hotels, airports, banks and country clubs etc.

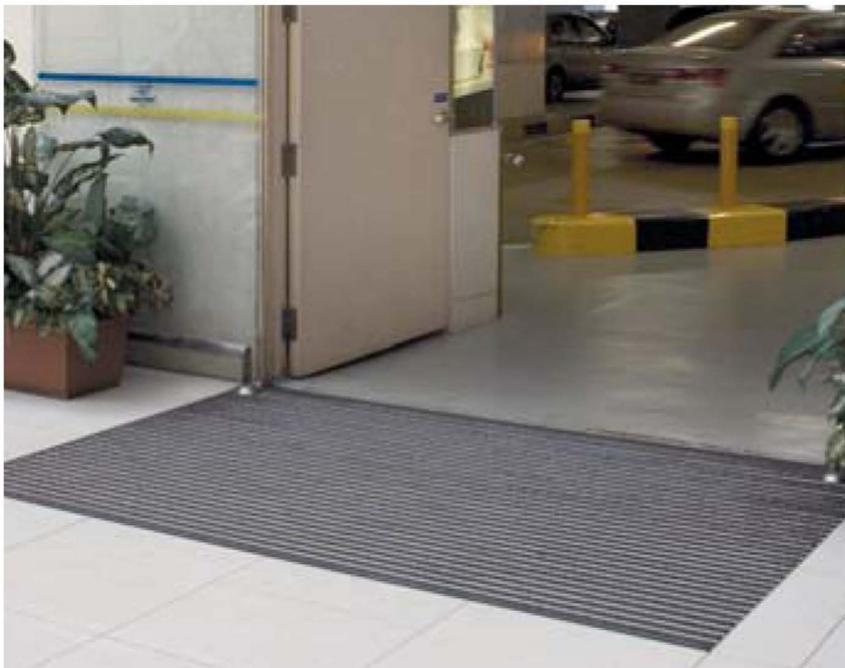


# ALTAC Aluminium Matting System

The ideal matting system for your specific needs.

## SPECIFICATIONS

<b>Carpet Model:</b>	INNER T Series
<b>Size:</b>	2m x 25m (can be customized)
<b>Material:</b>	Polypropylene
<b>Backing Material:</b>	Latex Backing
<b>Fabric Weight:</b>	1600g/m <sup>2</sup> ±
<b>Total Thickness:</b>	11mm ±
<b>Total Weight:</b>	1900g/m <sup>2</sup> ±
<b>Colour:</b>	Red / Black / Grey / Yellow

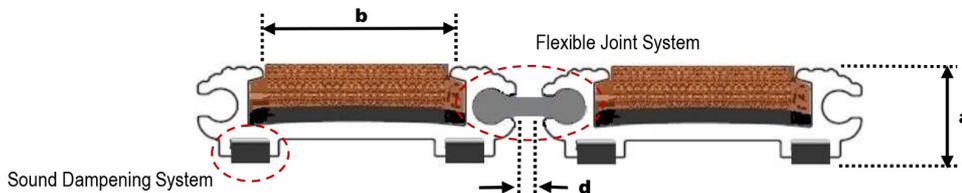

ALTAC Aluminium Matting System	Dimension
Matting Height (a):	17.0 mm
Carpet insert width (b):	25.0 mm
Aluminium Wall Thickness:	2.0 mm
Aluminium Panel Width (c):	42.5 mm
Space between 2 Panels (d):	3.2 mm



**NOTE:** ALTAC Aluminium Mat is installed in the recess-well with size tolerances as follows:

Panel direction: -4mm, +0mm

Traffic direction: -4mm, +0mm